


20. 炭素鋼製・ステンレス鋼製油圧用管フランジ


- JIS B2291
- 油圧用21MPa管フランジ SSB型、LSA型

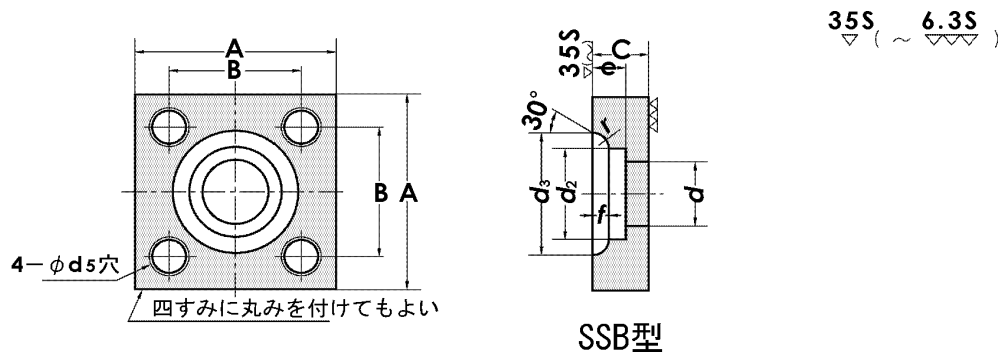

品 番	SSB型
	213S

単位 mm

径の呼び	SSB型													
	A		B		C		d		d ₂	e	d ₃	d ₅ (1)	f	r
1/2	54	±1	36	±0.2	22	0	16	22.2	+0.2	11	32	M10	3.5	5
3/4	58		40		22	-1	20	27.7	0	12	38	M10	4.0	5
1	68		48		28	0	25	34.5	+0.3	14	45	M12	4.0	5
1 1/4	76	±1.2	56	±0.4	28	-1.5	31.5	43.2		16	56	M12	6.0	5
1 1/2	92		65		36	0	37.5	49.1		18	63	M16	7.0	5
2	100	±1.5	73		36		47.5	61.1	+0.4	20	75	M16	7.0	5
2 1/2	128		92		45	-2	60	77.1		22	95	M20	9.5	6
3	140	±2	103		45		71	90.0		25	108	M22	11.0	6

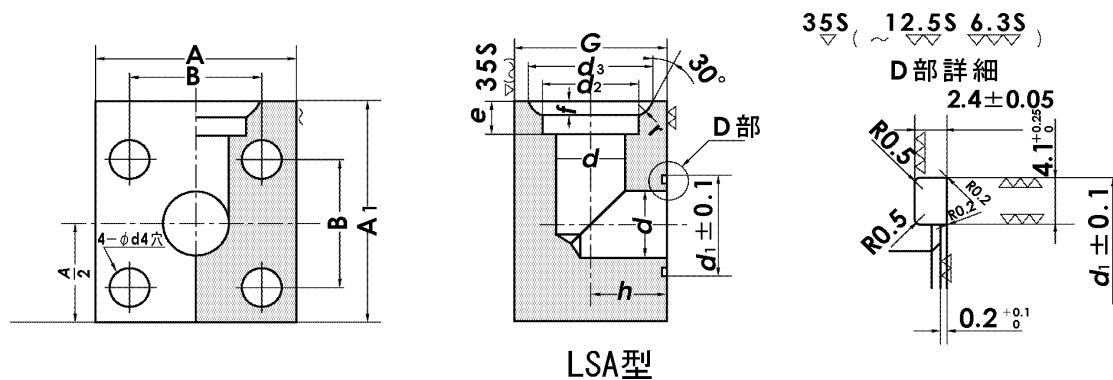

品 番	LSA型
	214S

単位 mm

径の呼び	LSA型																			
	A		A ₁		B		C		h	d	d ₁	d ₂		e	d ₃	d ₄	f	r	ボルト JIS B1176	リング JIS B2401
1/2	54	±1	63	±1	36	±0.2	40	0	20	16	30	22.2	+0.2	11	32	11	3.5	5	M10	G25
3/4	58		70		40		45		22.5	20	35	27.7	0	12	38	11	4.0	5	M10	G30
1	68		82		48		50		25	25	40	34.5	+0.3	14	45	13	4.0	5	M12	G35
1 1/4	76	±1.2	92	±1.2	56	±0.4	63	-2	31.5	31.5	45	43.2		16	56	13	6.0	5	M12	G40
1 1/2	92		110		65		71		35.5	37.5	55	49.1		0	18	63	18	7.0	5	M16
2	100	±1.5	125	±1.5	73		85		42.5	47.5	65	61.1	20	75	18	7.0	5	M16	G60	
2 1/2	128		150		92		106		53	60	80	77.1	+0.4	22	95	22	9.5	6	M20	G75
3	140	±2	170	±2	103				118		59	71	90	90.0	0	25	108	24	11.0	6