


26. ステンレス鋼製 JIS 管フランジ

- JIS B2220-1995 20 kgf/cm² 管フランジの基準寸法

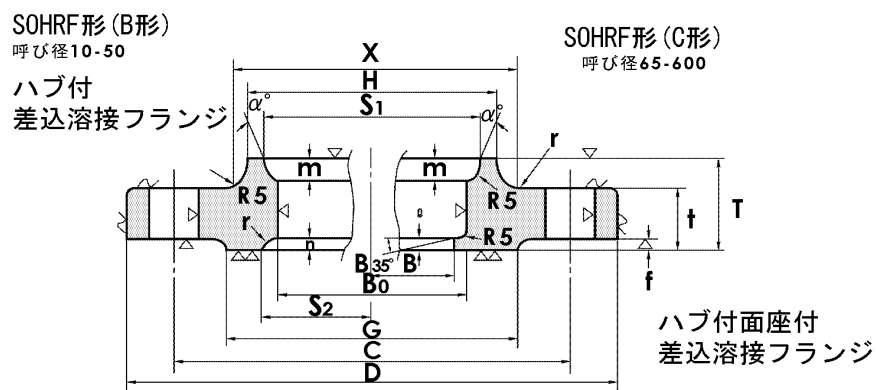

品 番	ハブ付差込溶接フランジ	ハブ付面座付差込溶接フランジ
	126W	127W

単位 mm

ボルト穴			ハブ部側内径の詳細			ガスケット面側			重 量(kg)			呼び径	
中心径	数	径				内径の詳細							
C			S1	m	α °	S2	n	L	PL形	SOH形	BL形	インチ	mm
65	4	15	27	4	-	27	4.0	-	0.6	0.59	0.6	3/8	10
70	4	15	31	4	-	31	4.0	-	0.7	0.65	0.7	1/2	15
75	4	15	37	4	-	37	4.0	-	0.8	0.81	0.9	3/4	20
90	4	19	44	4	-	44	4.5	-	1.3	1.29	1.5	1	25
100	4	19	52	4	-	53	5.0	-	1.6	1.6	1.8	1 1/4	32
105	4	19	58	4	-	59	5.5	-	1.7	1.69	2.0	1 1/2	40
120	8	19	70	4	-	72	5.5	-	1.9	1.89	2.4	2	50
140	8	19	94	6	20 °	85	6.0	6	2.6	2.6	3.4	2 1/2	65
160	8	23	107	6	20 °	-	-	6	3.8	3.93	4.9	3	80
170	8	23	120	6	20 °	-	-	6	4.4	4.56	6.0	3 1/2	90
185	8	23	132	6	20 °	-	-	6	4.9	5.13	6.9	4	100
225	8	25	160	7	30 °	-	-	6	7.8	8.3	11.0	5	125
260	12	25	186	8	30 °	-	-	6	10.1	10.6	14.9	6	150
305	12	25	237	9	30 °	-	-	6	12.6	13.3	21.4	8	200
380	12	27	290	10	30 °	-	-	6	21.9	23.4	37.2	10	250
430	16	27	345	11	30 °	-	-	6	25.8	27.7	48.8	12	300
480	16	33	384	12	35 °	-	-	6	36.2	39.2	68.0	14	350
540	16	33	437	13	35 °	-	-	7	51.7	54.2	99.4	16	400
605	20	33	490	15	35 °	-	-	7	66.1	71.7	129.1	18	450
660	20	33	544	16	35 °	-	-	7	77.4	86.2	158.4	20	500
720	20	39	595	16	35 °	-	-	7	92.2	105.0	194.0	22	550
770	24	39	646	18	35 °	-	-	7	101.1	119.0	226.9	24	600
850	24	48	-	-	-	-	-	-	147.6	-	311.6	26	650
900	24	48	-	-	-	-	-	-	168.0	-	370.9	28	700
970	24	56	-	-	-	-	-	-	212.7	-	460.1	30	750
1030	24	56	-	-	-	-	-	-	248.5	-	546.5	32	800
1090	24	56	-	-	-	-	-	-	280.5	-	626.2	34	850
1140	28	56	-	-	-	-	-	-	296.9	-	694.9	36	900