


3.2.水道用フランジF125(上水形)

● JIS G3451-1987

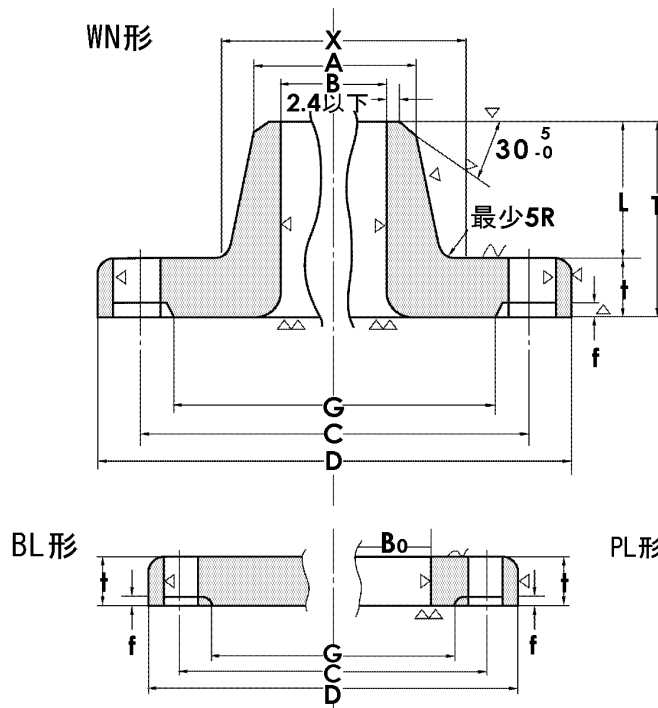

品 番	水道用フランジF125(上水形)	水道用突合せフランジ閉止F125(上水形)	差込溶接フランジ(上水形)
	140W	141W	142W

単位 mm

呼び径	外径 D	WN形 内径 B	SOP形 内径 Bo	厚み t	全長 T	ハブ長 L	ハブ元径 X	ハブ先径 A	座径 G	座厚 f	ボルト穴			重 量(kg)		
											中心径 C	数	径	SOP形	WN形	BL形
80	211	80.7	90.0	18	40	22	96.7	89.1	125	2	168	4	19	3.9	4.0	4.8
100	238	105.3	115.4	18	45	27	123.3	114.3	152	2	195	4	19	4.6	5.0	6.1
125	263	130.8	141.2	20	45	25	148.8	139.8	177	2	220	6	19	5.8	6.3	8.3
150	290	155.2	166.6	22	50	28	175.2	165.2	204	2	247	6	19	7.4	8.2	11.2
200	342	204.7	218.0	22	55	33	226.7	216.3	256	2	299	8	19	9.1	10.7	15.4
250	410	254.2	269.5	24	60	36	280.2	267.4	308	2	360	8	23	12.6	16.2	24.4
300	464	304.7	321.0	24	70	45	334.7	318.5	362	3	414	10	23	16.2	19.9	31.0
350	530	343.6	358.1	26	85	59	377.6	355.6	414	3	472	10	25	23.6	29.3	44.3
400	582	394.4	409.0	26	95	69	432.4	406.4	466	3	524	12	25	28.4	34.9	53.4
450	652	445.2	460.0	28	105	77	487.2	457.2	518	3	585	12	27	35.6	46.9	72.3
500	706	496.0	511.0	28	105	77	538.0	508.0	572	3	639	12	27	40.0	52.4	85.0
600	810	597.6	613.0	30	110	80	641.6	609.6	676	3	743	16	27	49.9	66.9	119.8
700	928	699.2	715.0	32	130	98	747.2	711.2	780	3	854	16	33	67.1	92.0	167.4
800	1034	798.8	817.0	34	130	96	848.6	812.8	886	3	960	20	33	81.9	112.0	220.8
900	1156	898.4	919.0	36	150	114	952.6	914.4	990	3	1073	20	33	106.2	152.0	293.4
1000	1262	998.0	1021.0	38	150	112	1054.0	1016.0	1096	3	1179	24	33	125.4	179.0	363.1
1100	1366	1097.6	1123.0	41	170	129	1159.6	1117.6	1200	3	1283	24	33	147.1	227.0	467.7
1200	1470	1197.2	1224.0	43	170	127	1261.2	1219.2	1304	3	1387	28	33	168.6	260.0	568.0
1350	1642	1347.6	1377.0	45	180	135	1415.6	1371.6	1462	3	1552	28	39	211.3	329.0	740.3
1500	1800	1496.0	1529.0	48	190	142	1568.0	1524.0	1620	3	1710	32	39	254.0	406.0	949.7

*JIS G3451のRF形を記載、GF形を要望の時は申し入れ下さい。

WN形内径寸法(B)の管厚は、JIS G3443に準拠。