


8.炭素鋼・ステンレス鋼鍛鋼製突合溶接型 SCH40 SCH80 SCH160

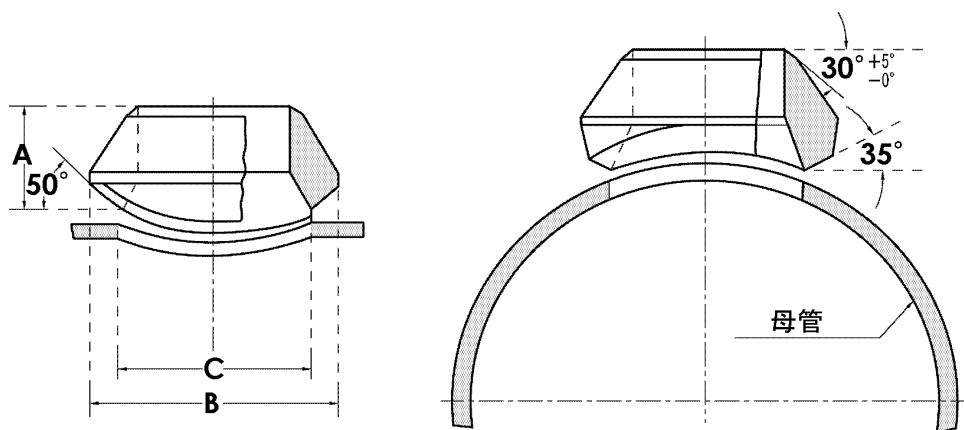

径違いウエルドオーレット

品 番	STD & SCH 40	XS & SCH 80	XXS & SCH 160
	418W	818W	918W

単位 mm

径の呼び	A			B			C		
	STD & SCH40	XS & SCH80	XXS & SCH160	STD & SCH40	XS & SCH80	XXS & SCH160	STD & SCH40	XS & SCH80	XXS & SCH160
1/8	16.0	16.0	-	25.4	25.4	-	16.0	16.0	-
1/4	16.0	16.0	-	25.4	25.4	-	16.0	16.0	-
3/8	19.1	19.1	-	31.8	31.8	-	19.1	19.1	-
1/2	19.1	19.1	28.7	35.1	35.1	35.1	23.9	23.9	14.2
3/4	22.4	22.4	31.8	44.5	44.5	44.5	30.2	30.2	19.1
1	26.9	26.9	38.1	54.1	54.1	50.8	36.6	36.6	25.4
1 1/4	31.8	31.8	44.5	65.0	65.0	62.0	44.5	44.5	33.3
1 1/2	33.3	33.3	50.8	73.2	73.2	69.9	50.8	50.8	38.1
2	38.1	38.1	55.6	88.9	88.9	81.0	65.0	65.0	42.9
2 1/2	41.4	41.4	62.0	103.1	103.1	96.8	76.2	76.2	54.1
3	44.5	44.5	73.2	122.2	122.2	120.7	93.7	93.7	73.2
3 1/2	47.8	47.8	-	143.0	143.0	-	101.6	101.6	-
4	50.8	50.8	84.1	152.4	152.4	152.4	120.7	120.7	98.6
5	57.2	57.2	93.7	185.7	185.7	187.5	141.2	141.2	122.2
6	60.5	77.2	104.9	215.9	219.2	212.9	169.9	169.9	146.1
8	69.9	93.7		263.9	270.0		220.7	220.7	
10	77.7	98.6		323.1	323.9		274.6	265.2	
12	85.9	100.1		378.0	379.5		325.4	317.5	
14	88.9	103.1		410.0	414.3		357.1	350.8	
16	93.7	106.4		464.1	466.9		407.9	403.4	
18	96.8	111.3		521.0	524.0		458.7	455.7	
20	101.6	119.1		572.0	528.7		508.0	509.5	
24	115.8	139.7		690.1	708.2		614.4	614.4	
26	119.1	146.1		739.9	765.3		666.8	692.2	
30	136.7	181.1		866.9	889.0		773.2	762.0	
36	136.7	212.9		1030.0	1055.1		927.1	914.4	