


1.炭素鋼鍛鋼製差込溶接型 JIS B2316 SCH80 SCH160

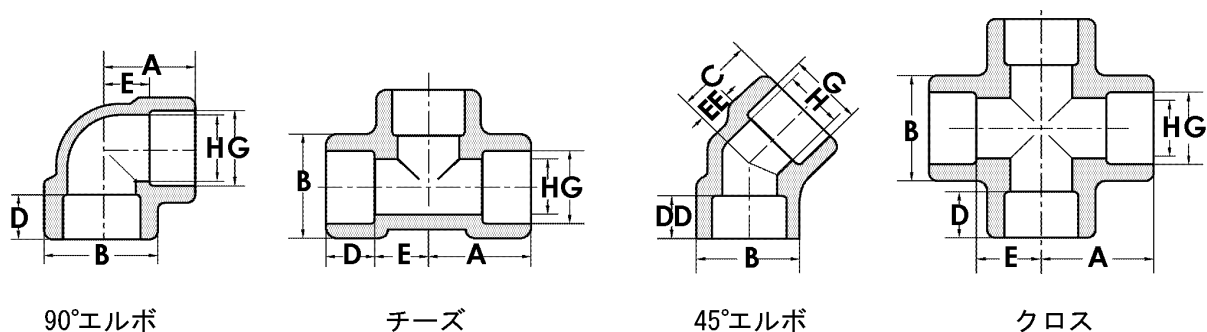

品 番	90° エルボ	チーズ	45° エルボ	クロス
SCH 80	301S	303S	302S	305S
SCH 160	601S	603S	602S	605S

単位 mm

径の呼び	差し込み部の内径	穴 径	差し込み部の深さ		SCH 80											
					90° エルボ			チーz			45° エルボ			クロス		
					A	B	E	C	B	EE	A	B	E			
1/8	11.0	7.1	10	10	21.1	23	11.1	17.9	23	7.9	21.1	23	11.1			
1/4	14.3	9.4	10	10	21.1	23	11.1	17.9	23	7.9	21.1	23	11.1			
3/8	17.8	12.7	12	11	25.5	27	13.5	18.9	27	7.9	25.5	27	13.5			
1/2	22.2	16.1	12	11	27.9	34	15.9	22.1	34	11.1	27.9	34	15.9			
3/4	27.7	21.4	14	13	33.1	39	19.1	25.7	39	12.7	33.1	39	19.1			
1	34.5	27.2	16	14	38.2	47	22.2	28.3	47	14.3	38.2	47	22.2			
1 1/4	43.2	35.5	18	15	45.0	56	27.0	33.5	56	17.5	45.0	56	27.0			
1 1/2	49.1	41.2	19	16	50.8	63	31.8	35.6	63	20.6	50.8	63	31.8			
2	61.1	52.7	22	17	60.1	76	38.1	42.4	76	25.4	60.1	76	38.1			
2 1/2	77.1	65.9	26	24	67.3	96	41.3	52.6	96	28.6	75.3	96	41.3			
3	90.0	78.1	29	32	86.2	110	57.2	63.8	110	31.8	86.2	110	57.2			
4	115.4	102.3	36	35	102.7	138	66.7	76.3	138	41.3	102.7	138	66.7			

単位 mm

径の呼び	差し込み 部の内径	穴 径	差し込み 部の深さ		SCH 160								
					90° エルボ チーズ			45° エルボ			クロス		
					A	B	E	C	B	EE	A	B	E
1/8	11.0	4.2	10	10	21.1	23	11.1	17.9	23	7.9	21.1	23	11.1
1/4	14.3	6.5	12	11	25.5	27	13.5	18.9	27	7.9	25.5	27	13.5
3/8	17.8	9.2	12	11	27.9	34	15.9	22.1	34	11.1	27.9	34	15.9
1/2	22.2	12.3	14	13	33.1	39	19.1	25.7	39	12.7	33.1	39	19.1
3/4	27.7	16.2	16	14	38.2	47	22.2	28.3	47	14.3	38.2	47	22.2
1	34.5	21.2	18	15	45.0	56	27.0	33.5	56	17.5	45.0	56	27.0
1 1/4	43.2	29.9	19	16	50.8	63	31.8	35.6	63	20.6	50.8	63	31.8
1 1/2	49.1	34.4	22	17	60.1	76	38.1	42.4	76	25.4	60.1	76	38.1
2	61.1	43.1	25	25	66.3	84	41.3	53.6	84	28.6	66.3	84	41.3
2 1/2	77.1	57.3	29	28	86.2	102	57.2	59.8	102	31.8	86.2	102	57.2
3	90.0	66.9	31	31	94.5	120	63.5	65.9	120	34.9	94.5	120	63.5
4	115.4	87.3	48	38	114.7	152	66.7	79.3	152	41.3	114.7	152	66.7

はJIS B2316規格に記載されていない為ANSI規格を参考にメーカー寸法で製作

二方異径TEE、三方異径TEEの寸法は、通しTEEに準じます。