



#### 4. 炭素鋼鍛鋼製捻込型と差込溶接型 SCH80 SCH160

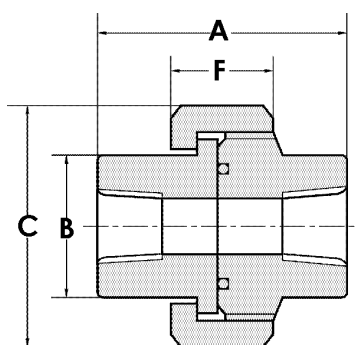

ユニオン捻込型

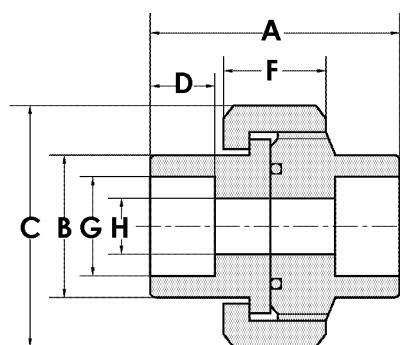

ユニオン差込溶接型

品番	ユニオン捻込型	ユニオン差込溶接型
SCH 80	304T	304S
SCH 160	604T	604S

単位 mm

径の呼び	SCH 80							
	G	H	D	A	B	C	F	オリソグ
1/8	11.0	7.1	10	35	22	35	19	P 18
1/4	14.3	9.4	10	35	22	35	19	P 18
3/8	17.8	12.7	12	41	26	41	19	P 21
1/2	22.2	16.1	12	46	32	46	20	G 25
3/4	27.7	21.4	14	57	38	54	22	G 30
1	34.5	27.2	16	62	46	63	27	G 35
1 1/4	43.2	35.5	18	71	56	80	28	G 50
1 1/2	49.1	41.2	19	77	63	89	30	G 55
2	61.1	52.7	22	86	75	104	35	G 65
2 1/2	77.1	65.9	26	103	93	124	37	G 85
3	90.0	78.1	29	109	108	145	38	G 100
4	115.4	102.3	36	130	135	180	58	G 125

単位 mm

径の呼び	SCH160							
	G	H	D	A	B	C	F	オリソグ
1/8	11.0	4.2	10	35	22	35	19	P 18
1/4	14.3	6.5	12	41	26	41	19	P 20
3/8	17.8	9.2	12	46	32	46	20	P 22
1/2	22.2	12.3	14	57	38	54	22	G 30
3/4	27.7	16.2	16	62	46	63	27	G 35
1	34.5	21.2	18	71	56	80	28	G 40
1 1/4	43.2	29.9	19	77	63	89	30	G 50
1 1/2	49.1	34.4	22	86	75	104	35	G 60
2	61.1	43.1	25	91	85	113	36	G 70
2 1/2	77.1	57.3	29	105	100	131	39	G 85
3	90.0	66.9	31	111	120	158	40	G 100
4	115.4	87.3	48	132	150	194	60	G 125

MSS規格を参考に製作