



7.炭素鋼製・ステンル鋼製差込溶接型 SCH80 SCH160

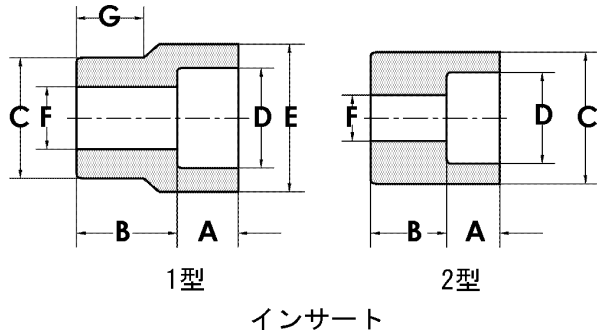

品番	SCH 80	SCH 160
	315S	615S

単位 mm

径の呼び	C	D	SCH 80						SCH 160					
			形状	A	B	E	F	G	形状	A	B	E	F	G
1/2 × 3/8	21.7	17.8	1	11	20.6	27	12.7	16	1	11	22.2	32	9.2	18
1/2 × 1/4	21.7	14.3	2	11	15.8		9.4		2	11	20.6		6.5	
1/2 × 1/8	21.7	11.0	2	11	15.8		7.1		2	11	20.6		4.2	
3/4 × 1/2	27.2	22.2	1	11	22.2	32	16.1	16	1	11	25.4	35	12.3	18
3/4 × 3/8	27.2	17.8	2	11	15.8		12.7		2	11	22.2		9.2	
3/4 × 1/4	27.2	14.3	2	11	17.5		9.4		2	11	22.2		6.5	
3/4 × 1/8	27.2	11.0	2	11	17.5		7.1		2	11	22.2		4.2	
1 × 3/4	34.0	27.7	1	14	23.8	38	21.4	17	1	14	28.5	42	16.2	19
1 × 1/2	34.0	22.2	2	11	15.8		16.1		2	11	20.6		12.3	
1 × 3/8	34.0	17.8	2	11	17.5		12.7		2	11	22.2		9.2	
1 × 1/4	34.0	14.3	2	11	19.0		9.4		2	11	23.8		6.5	
1 1/4 × 1	42.7	34.5	1	14	25.4	46	27.2	18	1	14	30.2	50	21.2	20
1 1/4 × 3/4	42.7	27.7	2	14	17.5		21.4		2	14	20.6		16.2	
1 1/4 × 1/2	42.7	22.2	2	11	19.0		16.1		2	11	22.2		12.3	
1 1/2 × 1 1/4	48.6	43.2	1	14	28.5	56	35.5	18	1	14	35.1	60	29.9	20
1 1/2 × 1	48.6	34.5	2	14	17.5		27.2		2	14	28.5		21.2	
1 1/2 × 3/4	48.6	27.7	2	14	19.0		21.4		2	14	25.4		16.2	
1 1/2 × 1/2	48.6	22.2	2	11	20.6		16.1		2	11	26.9		12.3	
2 × 1 1/2	60.5	49.1	1	14	31.7	63	41.2	19	1	14	46.0	68	34.4	21
2 × 1 1/4	60.5	43.2	2	14	20.6		35.5		2	14	23.8		29.9	
2 × 1	60.5	34.5	2	14	22.2		27.2		2	14	25.4		21.2	
2 × 3/4	60.5	27.7	2	14	23.8		21.4		2	14	26.9		16.2	
2 × 1/2	60.5	22.2	2	11	25.4		16.1		2	11	28.5		12.3	
2 1/2 × 2	76.3	61.1	1	17	46.0	76	52.7	22	1	17	42.8	84	43.1	24
2 1/2 × 1 1/2	76.3	49.1	2	14	34.9		41.2							
2 1/2 × 1 1/4	76.3	43.2	2	14	36.5		35.5							
2 1/2 × 1	76.3	34.5	2	14	38.1		27.2							
3 × 2 1/2	89.1	77.1	1	17	38.1	95	65.9	22						
3 × 2	89.1	61.1	2	17	25.4		52.7							
3 × 1 1/2	89.1	49.1	2	14	28.5		41.2							
3 × 1 1/4	89.1	43.2	2	14	30.1		35.5							
3 × 1	89.1	34.5	2	14	31.7		27.2							
4 × 3	114.3	90.0	2	17	33.2		78.1							
4 × 2 1/2	114.3	77.1	2	17	38.1		65.9							
4 × 2	114.3	61.1	2	17	38.1		52.7							
4 × 1 1/2	114.3	49.1	2	14	41.2		41.2							
4 × 1 1/4	114.3	43.2	2	14	42.8		35.5							
4 × 1	114.3	34.5	2	14	42.8		27.2							

MSS規格を参考に製作